


SERIES 800 ANALOGUE INDICATORS

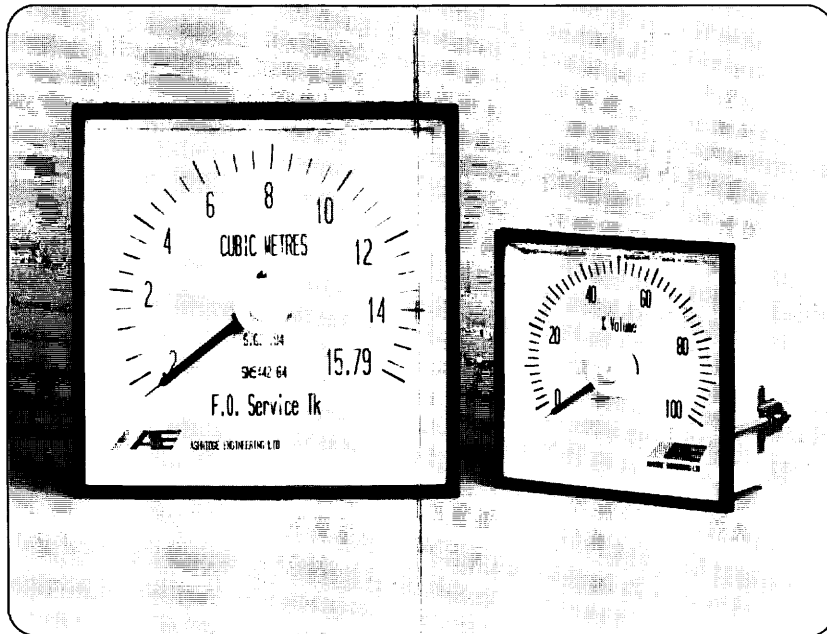

STANDARD FEATURES

- 1.5% Accuracy class
- 250 Degree Scale length
- 4-20 ma input
- Panel mounting
- Customised Dial Printing
- Marine Society Approvals

OPTIONAL FEATURES

- IP65 Wall Mounted Enclosure
- Integral Power Supply

ANCILLARY EQUIPMENT

- Tank Contents Transmitters
- Bore Hole Transmitters
- Reservoir & Well Transmitters
- Pressure Transmitters

MODELS 8096 & 8144 ANALOGUE INDICATORS

OPTIONS/ORDERING CODE

8096/

96 X 96 DIN Panel mounted indicator

8096/1

96 X 96 indicator in wall mounted enclosure to IP65, 185 X 150 X 130 deep.

8096/4

4 off 96 X 96 indicators in wall mounted enclosure to IP65, 300 X 300 X 175 deep.

8096/1/2

Specify power supply options

0 = No power supply

1 = 110 vac 50/60 Hz power supply

2 = 240 vac 50/60 Hz power supply

OPTIONS/ORDERING CODE

8144/

144 X 144 DIN Panel mounted indicator

8144/1

144 X 144 indicator in wall mounted enclosure to IP65, 300 X 300 X 175 deep.

8144/2

2 off 144 X 144 indicators in wall mounted enclosure to IP65, 370 X 300 X 175 deep.


8144/2/2

Specify power supply options

0 = No power supply

1 = 110 vac 50/60 Hz power supply

2 = 240 vac 50/60 Hz power supply

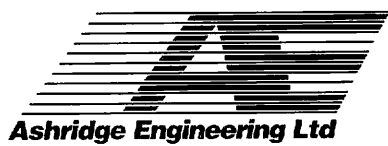

800-991
Subject to change without notification.

Ashridge Engineering Ltd
West View Road
OKEHAMPTON
Devon
EX20 1NF
Tel : +44 (0) 1837 53381
Fax : +44 (0) 1837 55022

AGENT: